

# SKIMMO®

## MODEL 20 & MODEL 27

### FEATURES

- Extracts minimum of 6 (GPH) of oil at 180°F solution temperature - even more at lower temperatures.
- Extracted up to 99% free of water - reusable after reprocessing
- Capable of removing different types of oil and grease.
- Automatic operation
- Suitable for highly corrosive solutions- parts in contact with the solution are stainless steel and teflon®.
- Reduces frequency of tank cleaning.
- Rapid return on investment.
- Two year warranty on materials and workmanship
- One year warranty on electric motor and gear box.

### *How Skimmo® Operates*

1. Oil and water are picked up from the surface of the tank by the pick-up drum by using surface tension, fed and deposited in the run-off trough by the doctor blade and empties in to the oil separating tube.


2. Oil, because of its lighter specific gravity rises to the top of the separating tube, is drained off by gravity through the oil discharge port, which is higher than the normal solution level. Water and washing solution because of their heavier specific gravity drop below the oil level and return to the tank through the bottom opening of the separating tube for reuse.



# SKIMMO® 20/27

3. If the tank has a load immersion, or similar cycle, the amount of solution displaced by the immersed load must not be allowed to rise more than 2.5" (63.5 mm) above the normal liquid level. If the solution level rises more than 2.5" (63.5 mm) above the normal solution level, a 3/4" solenoid valve should be installed in the oil discharge line to prevent water from being discharged through oil discharge port during the immersion cycle.

4. CAUTION: Since the oil discharge by the SKIMMO® (if installed according to instructions,) can contain up to 1% water, it is extremely

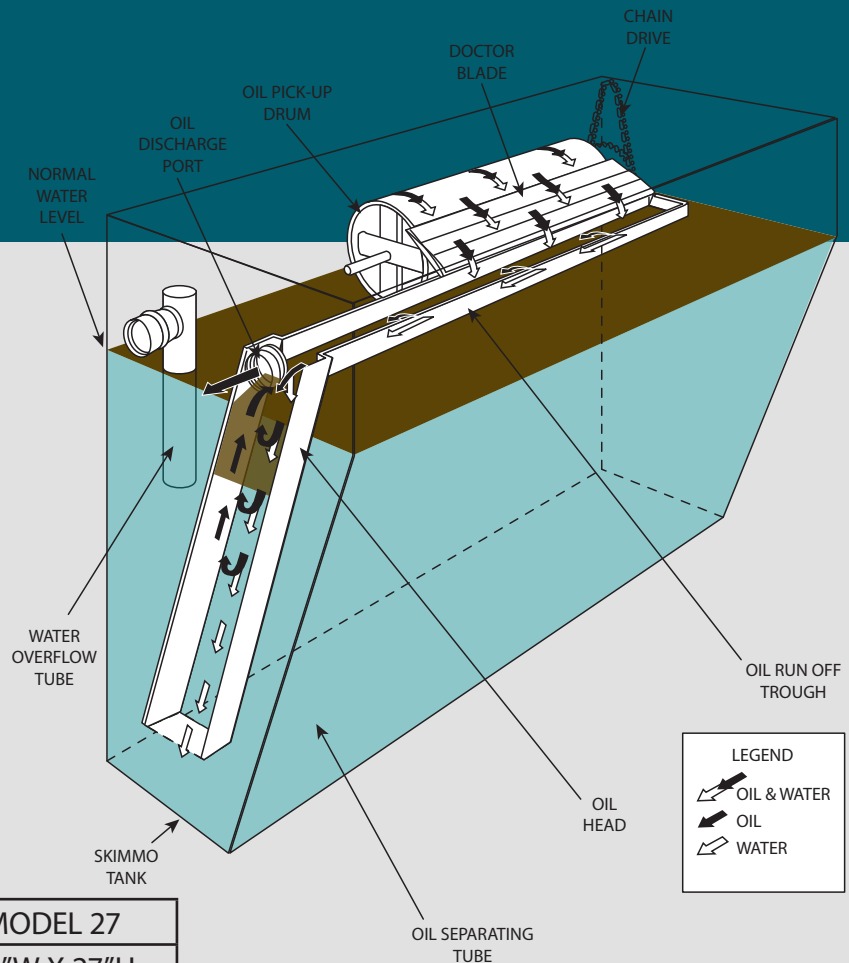

SPECIFICATIONS	MODEL 20	MODEL 27
CONTAINMENT TANK SIZE	34"W X 20"H 17"D	34"W X 27"H 17"D
DRUM LENGTH	14"	14"
DRUM TYPE	304 S.S	304 S.S
MOTOR	1/2 HP 230 <sup>1</sup> -460 3PH 60 Hz TEFC	1/2 HP 230 <sup>1</sup> -460 3PH 60 Hz TEFC
DOCTOR BLADE	TEFLON® <sup>2</sup>	TEFLON® <sup>2</sup>
BUSHINGS	TEFLON®/UHMW	TEFLON®/UHMW
UNIT WEIGHT	224 LBS	238 LBS
PAINT	MACHINE TOOL GRAY ENAMEL	

important that any quench oil recovered and intended for reuse be properly processed to remove all remaining water. Special precautions must be taken before any of the separated, recovered oil is reused in your plant because of the many possible contaminants which will not be separated by the SKIMMO®.

<sup>1</sup> Special voltages available at an additional charge

<sup>2</sup> Phenolic doctor blade available upon request

## Available Options

- Unit available in 100% 304 stainless steel at an additional charge
- Optional liquid level control available at an additional charge
- Single phase motors
- Engineered systems available

Please specify right or left hand oil discharge when ordering.



Industrial Separation & Process Solutions

WWW.HUDSONIND.COM


8031 EAST MARKET STREET - STE 2

WARREN, OH 44484 USA

OFFICE: 704-480-0014

FAX: 330-787-0299

E-MAIL: INFO@HUDSONIND.COM



Your Local Sales Contact